

Junction Box

J4 IP68

waterproof with aluminum cases
and nylon PA66 clamping glands



J4-S IP67


waterproof with stainless steel cases
and nylon PA66 clamping glands



Junction Box

Applications

- Shipment Weighing
- Weighing Platforms
- Special Weighing Systems

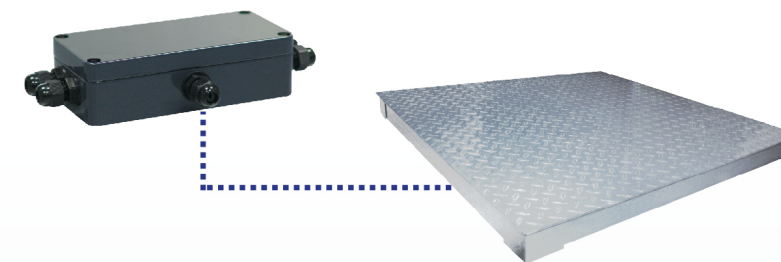

Features

- 2 to 4 load cell inputs
- Accepts cables from 3.5 mm to 7.0 mm in diameter
- Adjustments range: Approximately 4.2% of output for 350 ohm cells
- Unlimited extension for load cells connections
- Clamping gland torque 15 kg-cm or 1.5 N-m
- Locations of cornering adjustment pots are indicated by red circles

Specifications

IP Rating	J4 : IP68 J4-S : IP67
Cable Fittings	3.5mm to 7.0mm
Enclosure	J4 : Aluminum J4-S : stainless steel
Ports and Connectors	4 x load cell connector (PA66 gland) 1 x indicator connector (PA66 gland)
Trimming Potentiometers	4, each with up to 4.2% of cornering adjustment
Operating Temperature range	0°C ~ 40°C (32°F ~ 104°F)
Dimensions	4J : 135 x 65 x 38mm 4J-S : 145 x100 x 36.7mm



e-Access



6F, No. 127, Lane 235, Baoqiao Rd., Xindian District,
New Taipei City 23145, Taiwan



pm-all@excell.com.tw



+886-2-8919-1000



<https://www.excell-scale.com>



+886-2-8919-1177