



EXCELL[®]

Since 1979



HWH4

High Resolution Weighing Bench Scale







HWH4

High Resolution Weighing Bench Scale

Features:

- Up to 1/30,000 display resolution
- High speed 24bits AD for faster reading
- Energy-efficient switching power supply adapts to different power source voltages (AC 100V~240V)
- Improved operating efficiency and safety
- Auto power-off battery protection circuitry
- Overload protection
- Built-in rechargeable battery
- 10 operable keys
- Checkweighing for High/Low/OK limits with beeper warning
- Weight totalization and auto backlight
- Simple counting and auto average unit weight
- Kilogram(kg), pound(lb) weighing modes
- Zero; auto zero tracking; full range tare; preset tare
- Hold function (non-approval models only)

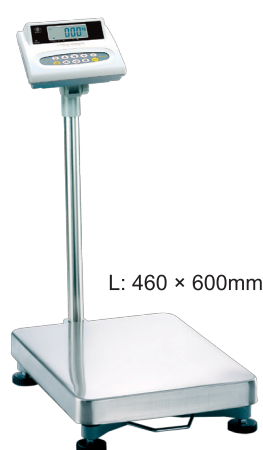

Options:

- RS232: Bidirectional transmission
- Relay: 3 sets of relay outputs

Specifications:

Model	Capacity	Division	Resolution
FHWH4 -30	30 kg (60 lb)	2 g (0.005 lb)	1/15,000
DHWH4 / LHWH4 / FHWH4 -75	75 kg (150 lb)	5 g (0.01 lb)	1/15,000
DHWH4 / LHWH4 / FHWH4 -150	150 kg (300 lb)	10 g (0.02 lb)	1/15,000
DHWH4 / LHWH4 / FHWH4 -300	300 kg (600 lb)	20 g (0.05 lb)	1/15,000
LHWH4 -600	600 kg (1200 lb)	50 g (0.1 lb)	1/15,000
FHWH4 -30	30 kg (60 lb)	1 g (0.002 lb)	1/30,000
DHWH4 / LHWH4 / FHWH4 -60	60 kg (120 lb)	2 g (0.005 lb)	1/30,000
DHWH4 / LHWH4 / FHWH4 -150	150 kg (300 lb)	5 g (0.01 lb)	1/30,000
DHWH4 / LHWH4 / FHWH4 -300	300 kg (600 lb)	10 g (0.02 lb)	1/30,000
LHWH4 -600	600 kg (1200 lb)	20 g (0.05 lb)	1/30,000

Operating Temperature: -10°C ~ 40°C (14°F ~ 104°F)

Power Source: AC 100V~240V (±10%) adapter + DC 6V/4Ah rechargeable battery

Display: LCD. 6 digits, Height 25 mm, LED Backlight

Indicator Dimensions: 260 × 210 × 117 mm (W × H × D)



EXCELL PRECISION CO., LTD.

6F, No.127, Lane 235, Baoqiao Rd., Xindian Dist., New Taipei City 23145, Taiwan
 Tel: +886-2-89191000 Website: www.excell-scale.com
 Fax: +886-2-89191177 E-mail: pm-all@excell.com.tw