



P-120S IP68 防水顯示器





P-120S IP68 防水顯示器

產品特色

◎ 類比規格

傳感器激發電源	DC 5V ±5%, 120 mA【可接 8 組 350 歐姆傳感器】
量測範圍	-0.1 至 4.0 mV/V
輸入靈敏度	0.16 uV/D
A/D 轉換率	約 100 次/秒

◎ 數位規格


顯示規格	6 個字元、紅色 LED、字高 16mm
小數點	可選擇 0, 0.0, 0.00, 0.000
顯示頻率	可選擇
顯示範圍	-99999 to 999999
最小感度	1, 2, 5, 10, 20, 50
狀態顯示	可選擇 4 種顯示狀態： Accu. V, Accu. C, SP1, SP2, SP3, Hi, OK, Lo, Under, Over, Unloading, Running, Hold
操作鍵	Stand by/Esc, Zero, Tare, F2, F1, F, Enter, G/N

◎ 介面 (選配)

OP-01	RS-422 / RS-485 / RS-232 介面
OP-03	類比輸出介面 (0 ~ 20mA, 0 ~ 10V)
OP-04	I/O 控制器 (4 In / 4 Out) + Setpoint Input (BCD Code)
OP-04E	Relay 輸出介面 (4 In / 4 Out)
OP-04C	Hi, Lo 數字開關輸入介面
OP-04F	數字開關輸入介面
OP-05	I/O 控制器 (8 In / 8 Out) 介面

◎ 一般規格

使用電源	100 ~ 240V AC, 50 / 60Hz
耗用電量	約 10 VA
適用溫度	0°C ~ 40°C
適用溼度	< 85% RH

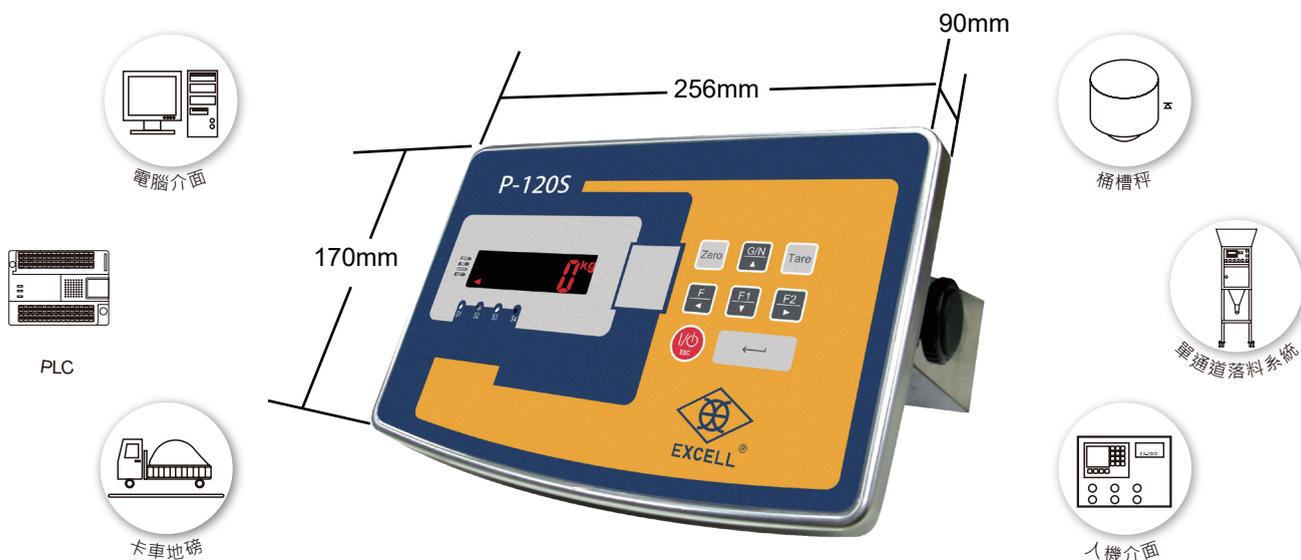

231 新北市新店區寶橋路235巷127號6樓



pm-all@excell.com.tw



+886-2-8919-1000



<https://www.excell-scale.com>



+886-2-8919-2209

