



Universal RS-232 Format Converter



**Configure your RS-232
Data to any format
at your fingertips.**

Fuji Apple

01 01 01

PACKED ON / SELL BY / WEIGHT

4.99


UNIT PRICE

1.70
PRICE

FEATURES

- ◆ Reconfigure/rearrange any RS-232 Data at your fingertips
- ◆ Use Function Box Config Tool (FBCT) to setup printing format/label with any programmable printer.
- ◆ Upload/download configuration files between Function Box/ Function Box Config Tool for quick setup
- ◆ FBCT supports English, Simplified Chinese and Traditional Chinese.
- ◆ Printing while saving data to USB FLASH. Support CSV, TXT, etc save format
- ◆ Ideal for retail/industrial packaging and for conversion interfaces between old and new systems

APPLICATION DIAGRAM

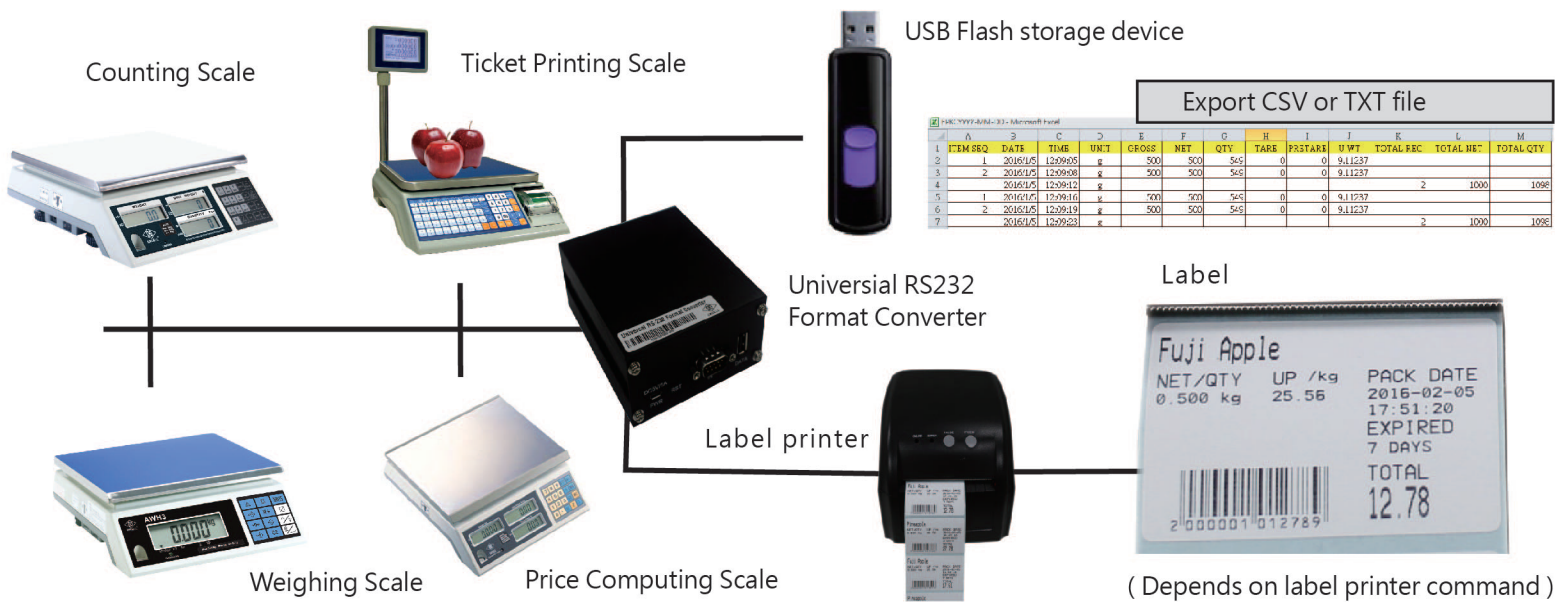

SPECIFICATION

Data Port	Setting Port
Data input : 1 port RS-232, Male DB9	Setting Port : Micro USB
Data output : 1 port RS-232, Male DB9	Baud Rate: 115200
Baud Rate: 4800/9600/14400/19200	Parity: None
/115200	Byte Size: 8
Parity: None/Odd/Even	Stop Bits: 1
Byte Size: 8/9	Communication Mode:
Stop Bits: 1/1.5/2	Half-Duplex
Communication Mode: Simplex	
USB Storage Port : TYPE-A	
Windows OS : XP SP3 and above	


Operating Temperature : 0°C ~ 40°C (32°F ~ 104°F)

Dimensions : 91.3 X 110 X 44.8 mm (W x H x D)

Weight of the Converter : Around 225 g

Power Source : 5V 1A

USB Storage Support : FAT / 16GB(max)

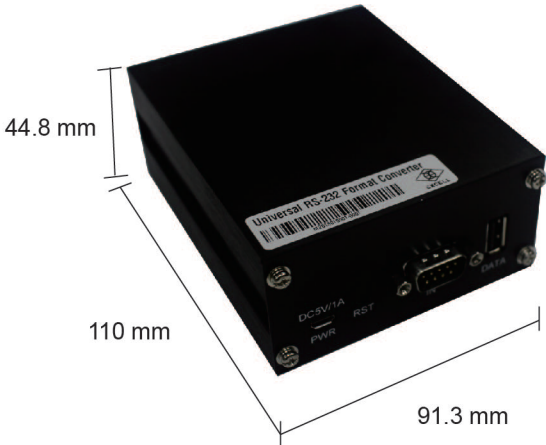

EXCELL PRECISION CO., LTD.

6F., No.127, Ln. 235, Baoqiao Rd., Xindian Dist., New Taipei City 231, Taiwan

Tel +886 2 8919 1000 Website www.excell-scale.com

Fax +886 2 8919 1177 E-mail sales@excell-scale.com